




eurosystems

Eurosystems
The future down to earth


2024 CATALOGUE



4 season



Haymaking



lawn
Artificial



Lawn



Garden



Soil



*printed on recycled paper

A large, abstract teal graphic consisting of several overlapping, curved shapes that sweep across the top and right side of the page, creating a sense of movement and depth.

The future down to earth

“

It is no coincidence
that we were born here,
everyone here
has been working
the fields for centuries


Carlo Bovi

Ours is a constantly evolving artisan work. We create machines that are simple to use and last over time, designed for bring different generations closer to gardening and horticulture.

We want to facilitate these jobs to make them accessible to everyone, just like nature. Vogliamo facilitare questi lavori per renderli accessibili a tutti, proprio come la natura.

Our products are born in Italy and then they reach many destinations: a piece of our Emilian history thus arrives in the garden or in the company of a customer on the other side of the world who shares our own passion.

It all started 50 years ago from Luzzara, in the province of Reggio Emilia, where we have seen our fathers work the land and then we have learned too. Here our story began and from here it continues and continues to grow.



Index

4 SEASONS – MULTI TOOL | One engine, endless uses

Multi tool	PI30	08
	P70 evo	16
	P55 evo	26
	Minieffe	36

HAYMAKING – SCYTHE MOWERS, ROTARY SCYTHES | The art of mowing

Scythe mowers	M210	44
	M90	46
Rotary scythes	Rs210	48
	Rs90	50

ARTIFICIAL LAWN – DECOMPACTOR, MOTOR-BRUSHES | Synthetically... perfect!

Decompactor	Deco90	54
Motor-brushes	Sweepy	56
	Sandy	58

LAWN – RIDE ON MOWERS, SCARIFIERS | A professionally prepared lawn


Ride on mowers	Slalom	62
	Asso	64
Scarifiers	Sc42	66

GARDEN – WHEEL BARROWS, MOTOR-SPRAYER | Effortless gardeners

Motocarriole	Carry	70
Motosprayer	Carry Sprayer	72
	Eco Sprayer	74

SOIL – REAR TINE TILLERS, TILLERS | Passion for vegetable gardens

Rear tine tillers	Rtt3	78
	Rtt2	80
Tillers	Euro102	82
	Z8	84
	Euro5 evo	86
	Euro3 evo	90
	Z3	92
	Z2	94
	LaZappa	96
	Z1	98



4 SEASONS
Multi-tool machines

One engine, endless uses.

The Eurosystems multi-tool machines are designed and built for maximising the engine's efficiency: allowing the machine to be used throughout the whole year means minimising the resources, the consumption and the maintenance.

From the hobbyist to the professional, from the care of wild lawns to the gardens, from the vineyards to the orchards, from the soil cultivation to the cleaning of outdoor surfaces, Eurosystems offers a series of models and tools that adapt to every need.

What are the benefits?

1

A wide range of accessories designed to fully exploit the potential of the machine in all 4 seasons, maximising its effectiveness and possibilities of use

2

Better use of the storage area: even with limited space available, it will be possible to have a fleet of machines suitable for all work requirements

3

Reduction and efficiency of engine maintenance operations, less use of primary material resources and reduction of the related environmental impact

4 SEASONS

P130

multi tool

HYDROSTATIC GEARBOX



RUNNING SPEED





0-3 Km/h  0-7 Km/h


PROFESSIONAL



P130

P130 ALPINE

ENGINE	B&S 3125 PB 344 cc 6.9 kW Petrol	B&S 3130 Intek 344 cc 7.8 kW Petrol	Honda GXV390 389 cc 7.6 kW Petrol	Honda GXV390 389 cc 7.6 kW Petrol	B&S 4195 Intek 500 cc 11.7 kW Petrol	NEW B&S Vanguard V-Twin 479 cc 11.9 kW / 16 HP Petrol
STARTER	recoil	recoil and electric	recoil/ recoil and electric	recoil and electric	recoil and electric	electric
HANDLEBAR	vertically and laterally adjustable + storage position			vertically and laterally adjustable + storage position		
TRANSMISSION	2 independent hydrostatic transaxels ZT-2200 (EZT) max slope: 25° max torque: from 0 to 291 Nm			2 independent hydrostatic transaxels ZT-2800 advanced max slope: 45° max torque: from 0 to 406 Nm		
PTO	 multi-plate clutch vertical PTO with coupling			 multi-plate clutch vertical PTO with coupling		
SLOPE ENGINE	-			electronic board and actuator for tilting of the engine		
STEERING SYSTEM	 PAS (powered assisted steering)			 PAS (powered assisted steering)		
DRIVE WHEELS	tyres, tractor profile (18x9.5-8")			tyres, tractor profile (18x9.5-8")		
NET WEIGHT	162 kg	167 kg	169kg / 174kg	178 kg	175 kg	184 kg
DIMENSIONS	97x169x128(h)			97x169x128(h)		

	GR. WEIGHT	194-216 KG
	PACKAGING	144X97X95(H) CM
	PALLET	147X100X190(H) CM / Q* 2PCS



FOLDING HANDLEBAR
for placing into storage
position via control
console



CONTROL CONSOLE
speed management, tool
connection, work mode,
adjustment management



ADJUSTABLE HANDLEBAR
laterally (3 positions) and
vertically
(7+1 positions)



SLOPE ENGINE
with electronic board and
actuator, maximum side
slope 40-45°



TOOL COUPLING
vertical coupling with
instant handlebar
connection system



PAS STEERING SYSTEM
servo-assisted
zero turn



AS STANDARD



ALPINE MODEL ONLY



PATENTED

4 SEASONS

P130

multi tool

WHEELS & EXTENSIONS



IRON WHEELS

Track EZT 96 cm
Track ZT 99 cm

 **GROSS WEIGHT 37 KG**
PACKAGING 52X52X55(H) CM



SMALL TYRES

Track EZT 81.6 cm
Track ZT 84.6 cm

 **GROSS WEIGHT 20 KG**
PACKAGING 52X52X55(H) CM



IRON EXTENSION FOR TYRES

Track ZT
137.5 cm *Alpine

 **GROSS WEIGHT 38 KG**
PACKAGING 52X52X55(H) CM



SNOW CHAINS

For standard pneumatic
wheels 18x9.5-8"

 **GROSS WEIGHT 3 KG**
PACKAGING 52X52X55(H) CM



IRON EXTENSION FOR IRON WHEELS

Track ZT
149 cm *Alpine

 **GROSS WEIGHT 31.5 KG**
PACKAGING 52X52X55(H) CM



CLAWED WHEELS

Track ZT
151 cm *Alpine

 **GROSS WEIGHT 20 KG**
PACKAGING 52X52X55(H) CM

NEW

DOUBLE ROTARY SCYTHE

OPERATION cutting discs (x2) with 4 inclined, pivoting and retractable blades

WORK WIDTH 115 cm

ADJUSTMENTS fixed cutting height at 5 cm

TRANSPORT WHEELS two pivoting and tilting front wheels

OTHER protective sheet, double-toothed drive belt, automatic braking system, idle rotating counter discs, reinforced steel discs

NET WEIGHT 127 kg

DIMENSION 120x128x65(h) cm



TRANSPORT WHEELS



PIVOTING BALDES (X4 EACH)



DOUBLE ROTARY DISC



G.WEIGHT142 KG - **PACKAGING** 130X120X65(H) CM - **PALLET** 130X120X130(H) CM / Q* 2PCS

4 SEASONS

P130

multi tool

FLAIL MOWER

OPERATION	ø 30 cm horizontal axis rotor with 32 floating knives
WORK WIDTH	80 cm
ADJUSTMENTS	cutting height 2<->10 cm with wheels 2<->7 cm with skids
TRANSPORT WHEELS	pivoting on tilting axle
OTHER	-
NET WEIGHT	100 kg
DIMENSION	94x100x70(h) cm



 G.WEIGHT 115 KG - PACKAGING 109X97X54(H) CM - PALLET 109X97X162(H) CM / Q* 3PCS

GRASSLAND MOWER


OPERATION	double rotor with vertical axis with 8 pivoting blades (4 each)
WORK WIDTH	92 cm
ADJUSTMENTS	cutting height 5 - 7 - 9 cm with fixed positions
TRANSPORT WHEELS	single, quick release
OTHER	- mulching cutting cap - 2 ballasts 4 kg each.
NET WEIGHT	76 kg
DIMENSION	97x117x61(h) cm




 G.WEIGHT 81 KG - PACKAGING 109X97X54(H) CM - PALLET 110X98X162(H) CM / Q* 3PCS

WEED BRUSH

OPERATION	quick-connect brush plate Ø 60 cm
WORK WIDTH	60 cm
ADJUSTMENTS	- work height - lateral ±90° - plate inclination 0°-2.5°-5°-7°
TRANSPORT WHEELS	single pivoting
OTHER	5 sets of interchangeable brushes
NET WEIGHT	71 kg
DIMENSION	93x104x62(h) cm

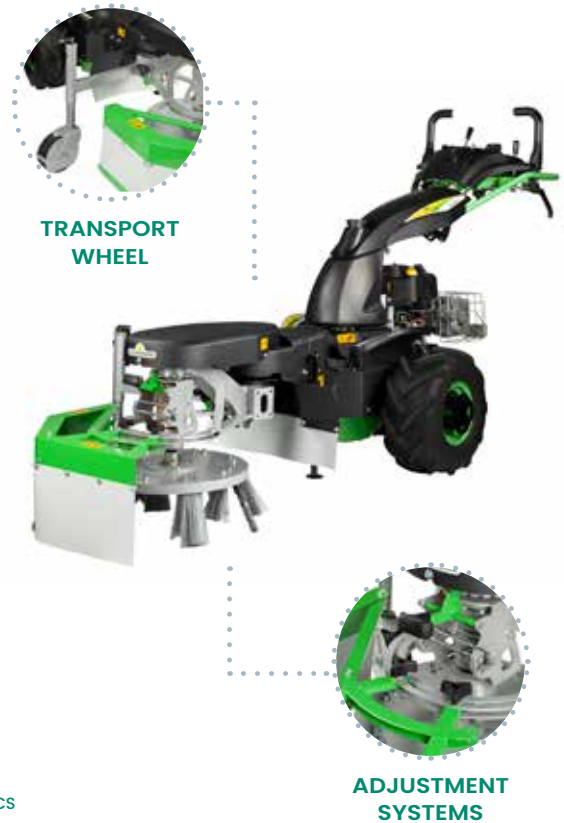

 **G.WEIGHT 85 KG** - **PACKAGING 109X97X54(H) CM** - **PALLET 110X98X162(H) CM** / Q* 3PCS



BRISTLE SET IRON FLAT
plate + flat bristles to be assembled on flange (not included)



BRISTLE SET IN THICK IRON
8 bundles to be assembled on plate and flange (not included)



BRISTLE SET PLASTIC
plate + plastic bristles to be assembled on flange (not included)



BRISTLE SET IN MIXED IRON
4+4 bundles to be assembled on plate and flange (not included)



BRISTLE SET IN IRON FINE
8 bundles to be assembled on plate and flange (not included)

4 SEASONS

P130

multi tool

CUTTING BAR

OPERATION	double-blade cutting system ESM, wide bar portal movement
WORK WIDTH	140 cm
ADJUSTMENTS	cutting height via skids 3<->6 cm
TRANSPORT WHEELS	two swivel wheels with quick coupler
OTHER	professional BIDOUX blade change system
NET WEIGHT	88.5 kg
DIMENSION	153x120x53(h) cm



 G.WEIGHT 122 KG - PACKAGING 158X130X43(H) CM - PALLET 158X130X86(H) CM / Q* 2PCS

HAY RAKE

OPERATION	8 combs on belt 2 pairs of tines for combs
WORK WIDTH	120<->155 cm
ADJUSTMENTS	work height via front wheels
TRANSPORT WHEELS	rubber, pivoting
OTHER	hay holder strip for adjustable rake
NET WEIGHT	115 kg
DIMENSION	156x126x102(h) cm



 G.WEIGHT 125 KG - PACKAGING 157X80X102(H) CM - PALLET 152X81X230(H) CM / Q*2PCS

SNOW BLADE

OPERATION front blade with rubber strip

WORK WIDTH 120 cm

ADJUSTMENTS
 - adjustable work height by means of skids
 - lateral $\pm 30^\circ$

TRANSPORT WHEELS -


OTHER shock-proof rubber protection

NET WEIGHT 53 kg

DIMENSION 119x161x134(h) cm



BUMPER STRIP

 **G.WEIGHT** 55 KG - **PACKAGING** 120X58X48(H) CM - **PALLET** 110X120X205(H) CM / Q* 8PCS

SNOW THROWER

OPERATION double stage with rotor \varnothing 40 cm
 icebreaker rotavators

WORK WIDTH 90 cm

ADJUSTMENTS
 - work height 0 - 6 cm
 - snow deflector 90° cm
 - adjustable ejection flue

TRANSPORT WHEELS side slides

OTHER
 - control extension rod
 - flue cleaner pipe

NET WEIGHT 130 kg

DIMENSION 91.5x161x143(h) cm



ICEBREAKER PROPELLERS

ADJUSTMENT LEVERS

 **G.WEIGHT** 162 KG - **PACKAGING** 109X97X54(H) CM - **PALLET** 110X98X162(H) CM / Q* 3PCS

4 SEASONS

P70evo

multi tool

MECHANICAL GEARBOX
belt transmission



RUNNING SPEED

2.1 Km/h
1.1 Km/h

3.5 Km/h
2.5 Km/h
1.1 Km/h

2.1 Km/h
1.1 Km/h

1.1 Km/h

SEMI-PROFESSIONAL



P70evo

ENGINE	B&S 850 E series	B&S 850 IS series	B&S 1000 Pxi	Euro 224.ohv	Euro R200.ohv
	190 cc	190 cc	223 cc	224 cc	200 cc
	3.7 kW	3.7 kW	4.2 kW	4.4 kW	3.5 kW
	Petrol	Petrol	Petrol	Petrol	Petrol

STARTER	recoil	electric	recoil	recoil	recoil
---------	--------	----------	--------	--------	--------

HANDLEBAR reversible, laterally and vertically adjustable

TRANSMISSION gears and endless screw in oil bath and belts

GEARS machine configuration with front tool: 3-Speed Forward, 2-Speed Reverse
machine configuration with rear tool: 2 forward gears, reverse gear

PTO vertical with belt

SLOPE ENGINE optional kit consisting of ballast and motor coupling system to work laterally on steep terrain (up to 45°)


STEERING SYSTEM reversible

DRIVE WHEELS tyres, tractor profile with mechanical semi-differential (15x6.00-6")

NET WEIGHT	58 kg	60 kg	58 kg	59 kg	59 kg
------------	-------	-------	-------	-------	-------

DIMENSIONS 57x135x110(h)

GR. WEIGHT	61-63 KG
PACKAGING	88X56X61(H) CM
PALLET	90X120X195(H) CM / Q* 6PCS



HANDLEBAR
laterally and
vertically adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



SLOPE ENGINE
kit with ballast for
lateral use on steep
terrain with a maximum
slope of 45°



HANDLEBAR
reversible with new quick
adjustment system



DRIVEN WHEELS
tractor profile with
mechanical semi-
differential



ELECTRICAL START
with battery, *on mod.
BS850 IS



AS STANDARD



ACCESSORY



PATENTED

4 SEASONS

P70evo

multi tool



BRUSH CUTTER

OPERATION	self-winding head wire Ø3 mm with 4 outputs (20-40mm) capacity: 2 x 7.5m rolls
WORK WIDTH	60 cm
ADJUSTMENTS	- plate inclination 0-6° - lateral to fixed positions: 0° - 15° - 30° - 45°
TRANSPORT WHEELS	-
OTHER	- handlebar control for wire extension - protective walls
NET WEIGHT	23 kg
DIMENSION	86x62x39(h) cm

 **G.WEIGHT** 25 KG - **PACKAGING** 73X71X42.5(H) CM - **PALLET** 80X120X225(H) CM / Q* 5PCS



**WIRE HEAD WITH
4 OUTPUTS**



**IDLE ROTATION
HEAD**



LATERAL
ADJUSTMENT



WIRE EXTENSION
COMMAND



PLATE
ORIENTATION

4 SEASONS

P70evo

multi tool

WHEELS – EXTENSIONS



IRON EXTENSION FOR TYRES

Single track
77 cm



SNOW CHAINS

For wheels
15x6.00 – 6"

SLOPE ENGINE KIT



The slope engine KIT allows, through the use of a ballast, the addition of a 25° rotation to the motor which means it can be used efficiently on steep terrain.

Patented system with automatic belt tensioner

Ballast 11 KG

GRASSLAND MOWER

OPERATION	6 pivoting blades on a vertical cross rotor
WORK WIDTH	63 cm
ADJUSTMENTS	cutting height 5 – 8 cm with fixed positions
TRANSPORT WHEELS	–
OTHER	–
NET WEIGHT	25 kg
DIMENSION	68x92x48(h) cm



6 PIVOTING KNIVES



 G.WEIGHT 30 KG – PACKAGING 92X69.5X42(H) CM – PALLET 92X70X210(H) CM / Q* 5PCS

CUTTING BAR

OPERATION	double blade movement, two oscillating blades (lower and upper)
WORK WIDTH	107 cm
ADJUSTMENTS	cutting height 2<->5.5 cm with skids
TRANSPORT WHEELS	-
OTHER	- grass spreader hood - adjustable skids

NET WEIGHT	23 kg
DIMENSION	111x68x30(h) cm



**DOUBLE BLADE
WITH ADJUSTABLE
SKIDS**



**G.WEIGHT 26 KG - PACKAGING 112X38X32(H) CM
PALLET 110X120X232(H) CM -Q* 18PCS**

ROTAVATOR

OPERATION	16 curved riveted knives rotor
WORK WIDTH	55 cm Ø32 cm
ADJUSTMENTS	work depth 0<->12.5 cm
TRANSPORT WHEELS	-
OTHER	adjustable spur
NET WEIGHT	24 kg
DIMENSION	55x78x58(h) cm



**TILLER WITH
16 KNIVES**



**G.WEIGHT 27 KG - PACKAGING 67X58X42(H) CM
PALLET 134X114X180(H) CM -Q* 16PCS**

ROTARY SCYTHE

OPERATION	4 retractable pivoting blades
WORK WIDTH	64 cm
ADJUSTMENTS	fixed cutting height at 3.6 cm
TRANSPORT WHEELS	-
OTHER	rake kit (optional accessory)
NET WEIGHT	27 kg
DIMENSION	67x78x49(h) cm



**RAKE KIT
(not included)**



**G.WEIGHT 29 KG - PACKAGING 70X60X37(H) CM
PALLET 80X120X197(H) CM -Q* 10PCS**

4 SEASONS

P70evo

multi tool

TRANSPORT TANK


OPERATION	tilting sheet metal tank load-bearing capacity: 85 l - 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	140-litre tank extension with quick coupling system (optional accessory)
NET WEIGHT	23.5 kg
DIMENSION	71x108x86(h) cm

 **G.WEIGHT** 26 KG - **PACKAGING** 88X56X61(H) CM - **PALLET** 90X120X195(H) CM / Q* 6PCS



FLAT TANK

OPERATION	flat platform in sheet metal with tilting plastic tank load-bearing capacity: 160 l - 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	-
NET WEIGHT	35 kg
DIMENSION	88x155x87(h) cm

 **G.WEIGHT** 38 KG - **PACKAGING** 111X66X71(H) CM - **PALLET** 114X134X225(H) CM / Q* 6PCS



HAY RAKE

OPERATION	7-comb belt with double tine
WORK WIDTH	100 cm
ADJUSTMENTS	work height via front wheels
TRANSPORT WHEELS	rubber
OTHER	hay holder strap adjustable
NET WEIGHT	90 kg
DIMENSION	152x218x130(h) cm




HAY HOLDER



G.WEIGHT 113.5 KG - **PACKAGING** 145X80X102(H) CM
-**PALLET** 152X81X204(H) CM -**Q*** 2PCS

DETHATCHER

OPERATION	96 springs on rotor Ø25 cm
WORK WIDTH	60 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	in rubber 20x5 cm
OTHER	-
NET WEIGHT	26 kg
DIMENSION	71x96x39(h) cm



SPRINGS ROTOR



G.WEIGHT 28.5 KG - **PACKAGING** 80X59X57(H) CM
-**PALLET** 80X120X240(H) CM -**Q*** 8PCS

RIDGING PLOW

OPERATION	rear quick coupler
WORK WIDTH	29 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	3 kg
DIMENSION	29x35x48(h) cm



G.WEIGHT 3.7 KG - **PACKAGING** 30X30X20(H) CM
-**PALLET** 90X120X100(H) CM -**Q*** 40PCS


4 SEASONS

P70evo

multi tool

SNOW THROWER

OPERATION	turbine with ice breaking propellers double-stage
WORK WIDTH	52 cm
ADJUSTMENTS	- height 2 - 3 cm - 90° deflector - 180° ejection flue
TRANSPORT WHEELS	-
OTHER	- flue control rod - flue cleaner pipe
NET WEIGHT	44 kg
DIMENSION	61.5x189x93(h) cm

 **G.WEIGHT** 50 KG - **PACKAGING** 88x56x61(H) CM - **PALLET** 90x120x195(H) CM / Q* 6PCS



SNOW BLADE

OPERATION	adjustable blade with front attachment
WORK WIDTH	85 or 100 cm
ADJUSTMENTS	- height 0-2 cm - lateral orientation ±30°
TRANSPORT WHEELS	-
OTHER	rubber shock-proof strip
NET WEIGHT	20 -32 kg
DIMENSION	85x126x109 (h) cm 100x126x109(h) cm

 **G.WEIGHT** 22 KG - **PACKAGING** 90x29x45(H) CM - **PALLET** 90x120x192(H) CM / Q* 16PCS

 **G.WEIGHT** 34 KG - **PACKAGING** 101x29x46(H) CM - **PALLET** 90x120x196(H) CM / Q* 12PCS



VACUUM/ BLOWER

OPERATION	suction fan + blower pipe
WORK WIDTH	78 cm
ADJUSTMENTS	height 2<-> 6.4 cm
TRANSPORT WHEELS	rubber pivoting
OTHER	- 185 l removable bag - blower Ø10x250 cm
NET WEIGHT	46.5 kg
DIMENSION	86x149x152(h) cm



BLOWER PIPE

G.WEIGHT 52 KG – PACKAGING 120X80X95(H) CM
-PALLET 80X120X190(H) CM -Q* 2PCS

BRUSH

OPERATION	polypropylene brush Ø30 cm
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holders (x2)
NET WEIGHT	44 kg
DIMENSION	79x183x78(h) cm



**HOLDER
(x2)**

G.WEIGHT 50 KG – PACKAGING 107X89X52(H) CM
-PALLET 90X120X220(H) CM -Q* 4PCS

ECO SPRAYER

OPERATION	12V 4.1 bar pump batteries (x2) 12V 5A/h
TANK	50 l
COMPATIBLE LIQUIDS	water, cryoform, fertilisers, pesticides
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	- handwashing tank - lance - hose 9 m
NET WEIGHT	41 kg
DIMENSION	71x149x111(h) cm



SPRAYER LANCE

G.WEIGHT 43 KG – PACKAGING 114X134X71(H) CM
-PALLET 114X134X230(H) CM -Q* 6PCS

4 SEASONS

P55evo

multi tool

MECHANICAL GEARBOX
belt transmission



RUNNING SPEED

1.3 Km/h 2.5 Km/h

1.3 Km/h 2.5 Km/h

AMATEUR



P55evo

ENGINE	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	B&S 675 EXi series 163 cc 2.8 kW Petrol	B&S 675 IS series 163 cc 2.8 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3.1 kW Electric
STARTER	recoil	recoil	recoil	electric	recoil	electric
HANDLEBAR	new quick adjustment system reversible, laterally and vertically adjustable					
TRANSMISSION	gears and endless screw in oil bath and belts					
GEARS	forward, reverse					
PTO	vertical with belt					
SLOPE ENGINE	-					
STEERING SYSTEM	reversible					
DRIVE WHEELS	tyres, tractor prifle with mechanical semi-differential (13x5,00-6")					
NET WEIGHT	44 kg	41 kg	41 kg	43 kg	42 kg	44 kg
DIMENSION	55x112x105(h)					



GR. WEIGHT 46-49 KG

PACKAGING 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS



HANDLEBAR
laterally and
vertically adjustable



HANDLEBAR
reversible with new quick
adjustment system



LEVERAGES
traction + tool coupling
with integrated safety
system



DRIVEN WHEELS
tractor profile



ELECTRICAL START
rechargeable battery
**only on mod. BS675IS*



AS STANDARD



ACCESSORY



PATENTED

4 SEASONS

P55evo

multi tool

GRASSLAND MOWER CLASSIC

OPERATION	single blade
WORK WIDTH	53 cm
ADJUSTMENTS	adjustable cutting height at 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
NET WEIGHT	22 kg
DIMENSION	61.5x95x35(h) cm



CLASSIC MOWING
BLADE

 **G.WEIGHT** 25.5 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM / Q* 5CS



NEW

GRASSLAND MOWER PRO

OPERATION	single rotor with 4 pivoting blades
WORK WIDTH	53 cm
ADJUSTMENTS	handlebar quick adjustment system, work height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
NET WEIGHT	23.5 kg
DIMENSION	96x61.5x35(h) cm



CUTTING HEIGHT ADJUSTMENT LEVER


GWEIGHT 27 KG - **P**ACKAGING 93.5x71.5x44.5(H) CM - **P**ALLET 92x70x210(H) CM / Q* 5PCS



ADJUSTABLE SKIDS



SINGLE ROTOR WITH 4 PIVOTING BLADES

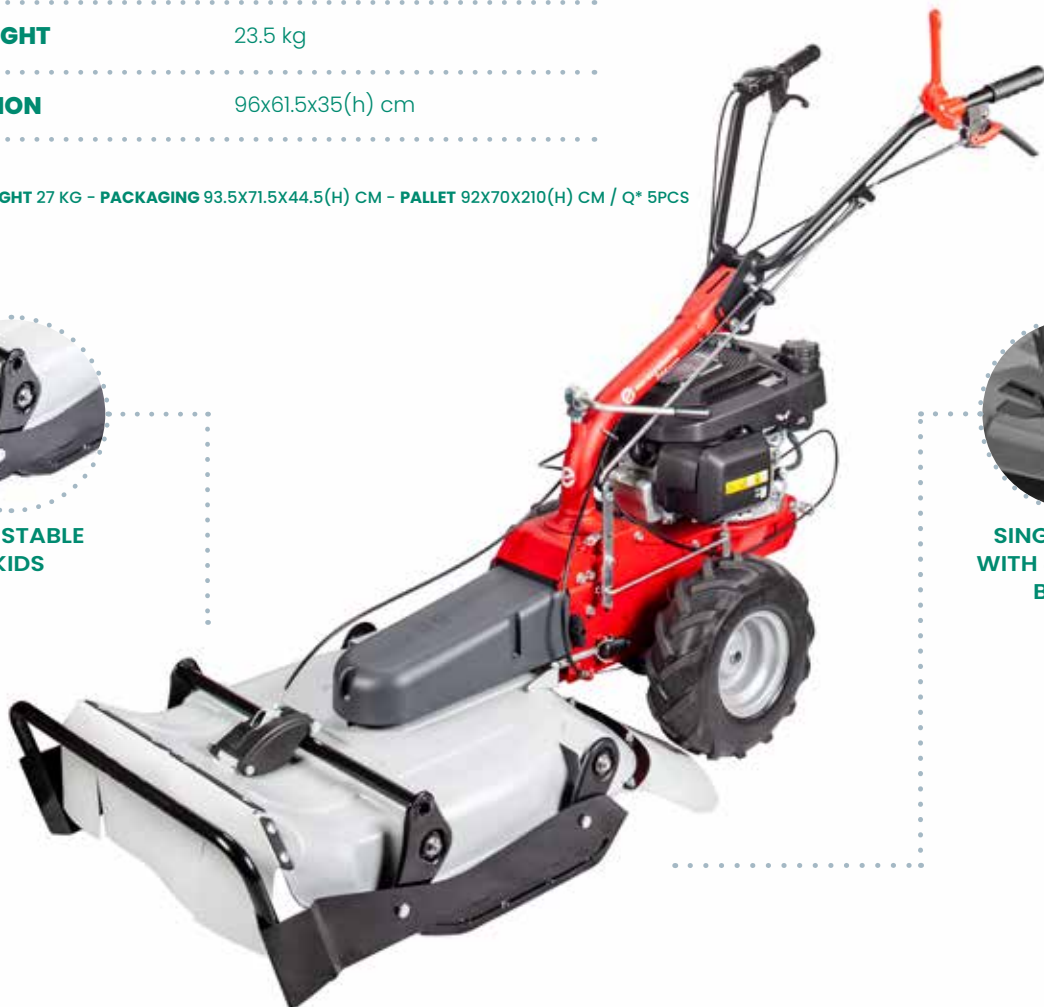

4 SEASONS

P55evo

multi tool

BRUSH CUTTER

OPERATION	self-winding head wire Ø3 mm with 4 outputs (20-40mm) capacity: 2 x 7.5m rolls
WORK WIDTH	60 cm
ADJUSTMENTS	- deck inclination 0-6° - side deck at 0° - 15° - 30° - 45°
TRANSPORT WHEELS	-
OTHER	- handlebar control for wire extension - protective walls
NET WEIGHT	20 kg
DIMENSION	86x62x39(h) cm


 **G.WEIGHT** 23 KG - **PACKAGING** 73X71X42.5 (H) CM - **PALLET** 80X120X225 (H) CM / Q* 5PCS



CUTTING BAR

bar Eurosystems or ESM


OPERATION	double blade movement oscillating lower and upper blade
WORK WIDTH	87 cm
ADJUSTMENTS	cutting height 1,5 <-> 4,7 cm
TRANSPORT WHEELS	-
OTHER	- Eurosystems skids included - ESM optional skids
NET WEIGHT	Eurosystems 16 kg ESM 15 kg
DIMENSION	Eurosystems 87x60x26 (h) cm ESM 89x39x20 (h) cm

 **G.WEIGHT** 18 KG - **PACKAGING** 40X88X28 (H) CM - **PALLET** 90X120X202 (H) CM - Q* 18PCS



ROTAVATOR

OPERATION	rear connection 16 knives
WORK WIDTH	50 cm, Ø26 cm
ADJUSTMENTS	working depth: 0<->6,5 cm
TRANSPORT WHEELS	-
OTHER	adjustable spur
NET WEIGHT	19 kg
DIMENSION	56x48x61(h) cm

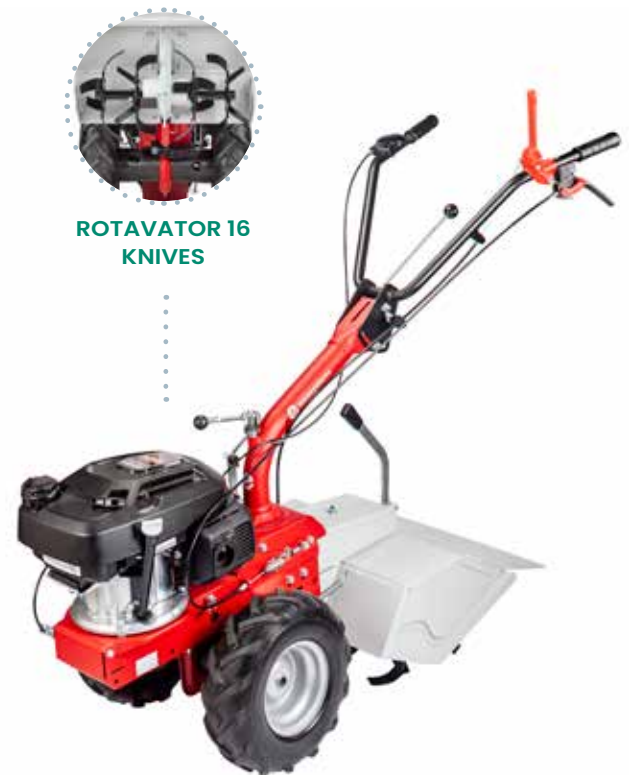

ROTAVATOR 16 KNIVES


 G.WEIGHT 21 KG - PACKAGING 52X52X55(H) CM - PALLET 110X120X236(H) CM / Q* 16PCS

ROTARY SCYTHE

OPERATION	4 retractable pivoting blades
WORK WIDTH	57 cm
ADJUSTMENTS	fixed cutting height at 3,2 cm
TRANSPORT WHEELS	-
OTHER	rake kit (optional)
NET WEIGHT	25 kg
DIMENSION	64x76x45(h) cm



RAKE KIT

 G.WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS

4 SEASONS

P55evo

multi tool


BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	105 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	36 kg
SIZE	104x86x100(h) cm



SIDE ADJUSTABLE
BRUSH



 G. 40 KG - PACKAGING 108X64X43(H) CM - PALLET 120X80X237(H) CM - Q* 5PCS


COLLECTION BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holder
NET WEIGHT	40 kg
SIZE	88x128x101(h) cm



REMOVABLE
HOLDER



 G.46 KG - PACKAGING 100X87X44(H) CM - PALLET 120X90X240(H) CM - Q* 5PCS

TRANSPORT TANK

OPERATION	tilting sheet metal tank load-bearing capacity: 85 l – 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	140-litre tank extension with quick coupling system (optional accessory)
NET WEIGHT	26 kg
SIZE	82x97x35.5 (h) cm



 **G.WEIGHT 28 KG – PACKAGING 88x56x61(H) CM – PALLET 90x120x195(H) CM / Q* 6PCS**

FLAT TANK

OPERATION	flat platform in sheet metal with tilting plastic tank load-bearing capacity: 160 l – 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	-
NET WEIGHT	34 kg
SIZE	88x155x87(h) cm



 **GROSS WEIGHT 36 KG – PACKAGING 116x53x70(H) CM – PALLET 110x120x222(H) CM / Q* 6PCS**


4 SEASONS

P55evo

multi tool

SNOW BLADE

OPERATION	adjustable blade with front attachment
WORK WIDTH	85 cm
ADJUSTMENTS	- height 0-2 cm - lateral $\pm 30^\circ$
TRANSPORT WHEELS	-
OTHER	shock-proof rubber
NET WEIGHT	18 kg
SIZE	85x93x96(h) cm

 G.WEIGHT 20 KG - PACKAGING 88X31X47(H) CM -PALLET 90X120X196(H) CM -Q* 16PCS



**SIDE ADJUSTABLE
BLADE**



DETHATCHER

OPERATION	96 springs on rotor $\varnothing 25$ cm
WORK WIDTH	60 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	in rubber 20x5 cm
OTHER	-
NET WEIGHT	18 kg
SIZE	62x62x33(h) cm

 GROSS WEIGHT 20 KG - PACKAGING 70X64X37(H) CM -PALLET 80X120X197(H) CM -Q* 10PCS



**ROTOR WITH
SPRINGS**



RIDGING PLOW

OPERATION	rear quick coupler
WORK WIDTH	29 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	3 kg
SIZE	29x35x48(h) cm



 **G.WEIGHT 3.7 KG - PACKAGING 30X30X20(H) CM -PALLET 90X120X100(H) CM -Q* 40PCS**

ECO SPRAYER

OPERATION	12V 4.1 bar pump batteries (x2) 12V 5A/h
TANK	50 l
COMPATIBLE LIQUIDS	water, cryoform, fertilisers, pesticides
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	- handwashing tank - lance - hose 9 m
NET WEIGHT	41 kg
SIZE	71x149x111(h) cm



**SPRAYER
LANCE**



 **GROSS WEIGHT 43 KG - PACKAGING 144X66X71(H) CM -PALLET 114X134X230(H) CM -Q* 6PCS**

4 SEASONS

Minieffe

multi tool

MECHANICAL REDUCER
belt transmission



RUNNING SPEED





AMATEUR



Minieffe

ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	B&S 625 EXi series 150 cc 2.3 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol
STARTER	recoil				
HANDLEBAR	vertically adjustable				
TRANSMISSION	endless screw in oil bath and belt				
GEARS	forward gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward, reverse gear
PTO	vertical with belt				
SLOPE ENGINE	-				
STEERING SYSTEM	-				
DRIVE WHEELS	tyres, tractor profile 13x5,00-6" (minieffe one-gear) puncture-proof, tractor profile 13x6,00-6" (minieffe reverse)				
NET WEIGHT	36.5 kg	41 kg	41 kg	41 kg	40 kg
DIMENSIONS	65x105x100(h)				

	GR.WEIGHT	40.5-45-44 KG
	PACKAGING	80X59X57(H) CM
	PALLET	80X120X240(H) CM / Q* 8PCS



TOOL LEVER
sheet metal pressure
coupling with integrated
safety system



TRACTION LEVERS
belt forward and reverse
(optional)



HANDLEBAR
laterally adjustable



DRIVIN WHEELS
tractor profile
ver. mono - 13x5,00-6"
ver. reverse - 13x6,00-6"



AS STANDARD



ACCESSORY



PATENTED

4 SEASONS

Minieffe

multi tool

NEW

GRASSLAND MOWER PRO

*cannot be used with engine B&S450

OPERATION	single rotor with 4 pivoting knives
WORK WIDTH	53 cm
ADJUSTMENT	handlebar quick adjustment system, work height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
NET WEIGHT	25 kg
DIMENSION	96x61.5x35(h) cm



CUTTING HEIGHT
ADJUSTMENT
COMMAND

4 FLOATING
KNIVES

 G.WEIGHT 27 KG - PACKAGING 93.5X71.5X44.5(H) CM - PALLET 92X70X210(H) CM / Q* 5PCS

GRASSLAND MOWER CLASSIC

*cannot be used with B&S450 engine

OPERATION	single blade
WORK WIDTH	53 cm
ADJUSTMENTS	adjustable work height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
NET WEIGHT	22 kg
DIMENSION	61.5x95x35(h) cm




CLASSIC MOWING
BLADE

 G.WEIGHT 25.5 KG - PACKAGING 93.5X71.5X44.5(H) CM - PALLET 92X70X210(H) CM / Q* 5PCS

BRUSH CUTTER

*cannot be used with engine B&S450


OPERATION	self-winding head wire Ø3 mm with 4 outputs (20-35mm) capacity: 2 x 7m rolls
WORK WIDTH	60 cm
ADJUSTMENTS	- plate inclination 0-6° - lateral to fixed positions: 0° - 15° - 30° - 45°
TRANSPORT WHEELS	-
OTHER	- handlebar control for wire extension - protective walls
NET WEIGHT	23 kg
DIMENSION	86x62x39(h) cm

 **G. WEIGHT 26 KG - PACKAGING 73X71X42(H) CM - PALLET 80X120X225(H) CM / Q* 5PCS**



CUTTING BAR

OPERATION	 single-blade movement fixed lower blade oscillating upper blade
WORK WIDTH	87 cm
ADJUSTMENTS	cutting height 2.5 <-> 5.0 cm
TRANSPORT WHEELS	-
OTHER	self-greasing head
NET WEIGHT	18 kg
DIMENSION	53x93x30(h) cm

 **G. WEIGHT 18 KG - PACKAGING 40X88X28(H) CM - PALLET 90X120X202(H) CM - Q* 18PCS**



4 SEASONS


Minieffe

multi tool

ROTARY SCYTHE


*cannot be used with B&S450 engine

OPERATION	4 retractable pivoting blades
WORK WIDTH	57 cm
ADJUSTMENTS	fixed cutting height at 3.2 cm
TRANSPORT WHEELS	-
OTHER	rake kit (optional)
NET WEIGHT	25 kg
DIMENSION	76x64x45(h) cm



RAKE KIT (OPTIONAL)



 **G. WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS**


SNOW BLADE

OPERATION	adjustable blade with front attachment
WORK WIDTH	29 cm
ADJUSTMENTS	- height 0-2 cm - lateral $\pm 30^\circ$
TRANSPORT WHEELS	-
OTHER	shock-proof rubber
NET WEIGHT	18 kg
DIMENSION	85x93x96(h) cm



SIDE ADJUSTABLE BLADE



 **G. WEIGHT 20 KG - PACKAGING 88X31X47(H) CM - PALLET 90X120X196(H) CM - Q* 16PCS**

BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	105 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	36 kg
DIMENSION	86x105x100(h) cm



SIDE ADJUSTABLE BRUSH



 G. WEIGHT 40 KG - PACKAGING 108X64X43(H) CM -PALLET 120X80X237(H) CM -Q* 5PCS

COLLECTION BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holder
NET WEIGHT	40 kg
DIMENSION	128x87x101(h) cm



REMOVABLE HOLDER



 G. WEIGHT 46 KG - PACKAGING 100X87X44(H) CM -PALLET 120X90X240(H) CM -Q* 5PCS



HAYMAKING

Scythe mowers and rotary scythes

The art of mowing.

Haymaking is an art that calls for time, experience, patience and precision.

Eurosystems has been committed to designing and building high quality grass cutting equipment for over 50 years to guarantee its customers a practical, efficient and robust machine.

Eurosystems' lengthy experience, its many qualitative tests and checks and its use of professional solutions for hobby use make Eurosystems mowers work tools extremely reliable and durable, ideal for small and medium-sized plots of land.

What are the benefits?



We are European category leaders, we produce amateur and semi-professional mowers with the best value for money on the market



We minimise waste: we design our machines to last over time and to be repaired at low costs even after 20 years



We adapt professional cutting solutions to amateur machines offering the highest work performance in the category

HAYMAKING

M210

scythe mower

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



M210

ENGINE	B&S 450 and 125 cc 1.8 kW Petrol	B&S 625 EXi 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	NEW EGOpower+ e-powered 56 V 3.1 kW Electric
STARTER	recoil	recoil	recoil	recoil	recoil	electric
HANDLEBAR	laterally and vertically adjustable					
TRANSMISSION	endless screw in oil bath and belt					
CUTTING SYSTEM	double blade movement - oscillating upper and lower blade mowing bar: Eurosystems or ESM cutting width 87 cm					
OTHER	Eurosystems cutting bar with adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm ESM cutting bar with optional adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm					
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"					
NET WEIGHT	50.5 kg	51 kg	50.5 kg	51.5 kg	51 kg	54 kg
DIMENSIONS	87x157x90(h) cm					



GR.WEIGHT 54.5-59 KG
PACKAGING 80X59X57(H) CM
PALLET 80X120X240(H) CM / Q* 8PCS



HANDLEBAR
vertically and laterally
adjustable



BI-LAMA MOVEMENT
two oscillating cutting
blades 87 cm



LEVERAGES
traction + tool coupling
with integrated safety
system



DRIVEN WHEELS
tractor profile
13x5.00-6"



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



ACCESSORY



PATENTED

HAYMAKING

M90

scythe mower

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



M90

	B&S 450 E series	Euro 123.ohv	B&S 625 EXi series	Euro R170.ohv
ENGINE	125 cc 1.8 kW Petrol	123 cc 2.2 kW Petrol	150 cc 2.3 kW Petrol	173 cc 3.2 kW Petrol

STARTER recoil

HANDLEBAR vertically adjustable

TRANSMISSION endless screw in oil bath and belt

CUTTING SYSTEM  single blade movement: fixed lower blade, oscillating upper blade
cutting width 87 cm

OTHER skids for adjustment of cutting height 2.5 <-> 5.0 cm

DRIVE WHEELS anti-puncture, tractor profile 13x5.00-6"

NET WEIGHT	48.5 kg	48.5 kg	49 kg	49.5 kg
-------------------	---------	---------	-------	---------

DIMENSIONS 93x138x104(h) cm



GR. WEIGHT 51.5-52.5 KG

PACKAGING 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS



LEVERAGES

traction + tool coupling
with integrated safety
system



SINGLE-BLADE MOVEMENT

upper oscillating blade,
cut 87 cm



**ADJUSTABLE
HANDLEBAR**

vertically



GRASS SPREADER HOOD

oscillating, patented



SNOW BLADE

85 cm
adjustable $\pm 30^\circ$



AS STANDARD



ACCESSORY



PATENTED

HAYMAKING

Rs210

rotary scythe

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



Rs210

ENGINE	B&S 675 EXi series 163 cc 2.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol
	STARTER	recoil	
	HANDLEBAR	laterally and vertically adjustable	
TRANSMISSION	endless screw in oil bath and belt		
CUTTING SYSTEM	rotary disc with vertical axis Ø64 cm with 4 retractable blades fixed cutting height 3.2 cm		
OTHER	rake kit (optional)		
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"		
NET WEIGHT	65 kg	66 kg	66 kg
DIMENSIONS	67x164x107(h) cm		



GR.WEIGHT 69-68 KG

PACKAGING MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM

PALLET MACHINE 80X120X240(H) CM / Q* 8PZ ROTARY DISC 80X120X164(H) CM / Q* 8PCS



LEVERAGES

traction + tool coupling
with integrated safety
system



HANDLEBAR

vertically and laterally
adjustable



ROTARY DISC

4 retractable blades
cutting width 64 cm



RAKE KIT

strip with side sheet for
windrow creation



SNOW BLADE

85 cm
adjustable $\pm 30^\circ$



AS STANDARD



ACCESSORY



PATENTED

HAYMAKING

Rs90

rotary scythe

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



Rs90

ENGINE	B&S 575 Ex series 140 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol
STARTER	recoil		
HANDLEBAR	vertically adjustable		
TRANSMISSION	endless screw in oil bath and belt		
CUTTING SYSTEM	rotary disc with vertical axis Ø57 cm with 4 retracted blades fixed cutting height 3.2 cm		
OTHER	rake kit (optional)		
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"		
NET WEIGHT	62.5 kg	63 kg	63 kg
DIMENSIONS	64x162x107(h) cm		




G.WEIGHT 66 KG

PACKAGING MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM

PALLET MACHINE 80X120X240(H) CM / Q* 8PCS ROTARY DISC 80X120X164(H) CM / Q* 8PCS



HANDLEBAR
vertically adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



ROTARY DISC
4 retractable blades
cutting width 57 cm



RAKE KIT
strip with side sheet for
windrow creation



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



ACCESSORY



PATENTED



ARTIFICIAL LAWN

Decompactor and motor brushes

Synthetically... perfect!

Less care required and less wastage of water resources: these are just some of the reasons that have led synthetic grass pitches to be used more and more frequently, both for domestic and for sports use.

However, this does not mean that these pitches do not require periodic maintenance and cleaning operations.

Eurosystems has developed a complete range of products that allow the lawn to last for a long time while optimally maintaining its physical-technical characteristics.

What are the benefits?

1

A complete range to perform the necessary maintenance in small and medium-sized domestic or sports fields

2

Products developed in collaboration with professional maintenance technicians and installers in order to obtain certified results

3

Correct cleaning and maintenance of synthetic grass lawns extend their useful life and maintain their physical-technical characteristics over time

ARTIFICIAL LAWN

Deco90

decompactor

MECHANICAL GEARBOX
belt transmission



RUNNING SPEED


2.1 Km/h 1.1 Km/h  3.5 Km/h 2.5 Km/h 1.1 Km/h

SEMI-PROFESSIONAL




Deco90

ENGINE	Briggs&Stratton 1000 Pxi 223 cc 4.3 kW Petrol
STARTER	recoil
HANDLEBAR	laterally and vertically adjustable
TRANSMISSION	gears and endless screw in oil bath and belts
WORKING SYSTEM	rotor 80 cm with 156 springs, 142 rpm brushes (x2) 90 cm dione oscillating one fixed, polypropylene bristles 95 mm independent engagement levers for rotor and brush
ADJUSTMENTS	spring rotor work depth 0 <-> 5 cm brush height precision adjustment 0 <-> 1 cm
DRIVE WHEELS	tyres, tractor profile with mechanical semi-differential (15x6.00-6")
OTHER	4 swivel wheels Ø17.5 cm limit stops for transport optional kit with 11 kg front ballast system
NET WEIGHT	143 kg
DIMENSIONS	105x168x95(h) cm

	GR.WEIGHT 172.5 KG
	PACKAGING 168X105X96(H) CM
	PALLET 168X105X192 (H) CM / Q* 2PCS



PIVOTING WHEELS (x4)
with limit stop for transport



TOOL COUPLING LEVER
sheet metal pressure with integrated safety system



ROTOR COUPLING LEVER
with management of work depth levels



SPRING ROTOR
independent activation
80 cm - 142 rpm



BRUSHES (x2)
of which oscillating front
with independent coupling
and work depth adjustment
controls



AS STANDARD



ACCESSORY



PATENTED

ARTIFICIAL LAWN

Sweepy

motor brush

BELT TRANSMISSION



RUNNING SPEED



AMATEUR



Sweepy

	B&S 675 Exi series	Euro R170.ohv	Euro 196.ohv	Honda GCVx170	NEW EGOpower+ e-powered
ENGINE	163 cc 2.8 kW Petrol	173 cc 3.2 kW Petrol	196 cc 3.8 kW Petrol	166 cc 3.6 kW Petrol	56 V 3,1 kW electric
STARTER	recoil	recoil	recoil	recoil	electric
TRANSMISSION	v-belt				
ROTOR	nylon helical brush Ø16 cm work width 36 cm, adjustable work depth 0 <-> 2 cm rotation speed 2.600 rpm				
OTHER	45 lt collection bag				
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings				
NET WEIGHT	34 kg	34 kg	35.5 kg	34 kg	36 kg
DIMENSIONS	56x121x100(h) cm				

	GR.WEIGHT 38-40 KG
	PACKAGING 80X59X57(H) CM
	PALLET 80X120X240(H) CM / Q* 8PCS



COLLECTION BAG
nylon removable
capacity 45 l



TOOL COUPLING LEVER
sheet metal pressure with
integrated safety system



SELF-CLEANING WHEELS
Ø20 cm
with ball bearings



ADJUSTMENT LEVER
spring rotor work depth



HELICAL BRUSH
in nylon 36 cm
2,600 rpm



SIEVE BAG
nylon with sieve
capacity 45 l



AS STANDARD



ACCESSORY



PATENTED

Sandy

motor brush

RUNNING SPEED



AMATEUR



Sandy

ENGINE	Euro E900 900 W 230 V 50 Hz Electric
STARTER	electric
HANDLEBAR	adjustable into double pre-set positions
TRANSMISSION	endless screw
BRUSH	polypropylene brush Ø28 cm work width 60 cm rotation speed 150 rpm direction of rotation: towards the operator
OTHER	-
WHEELS	-
NET WEIGHT	18 kg
DIMENSIONS	68x112x107(h) cm



GR.WEIGHT	21 KG
PACKAGING	80X59X57(H) CM
PALLET	80X120X240(H) CM / Q* 8PCS



HANDLEBAR

adjustable in two pre-set positions



STARTER

electrician with quick-release safety system



BRUSH

in polypropylene
Ø28 cm, width 60 cm



AS STANDARD



ACCESSORY



PATENTED



LAWN

Ride on mowers and scarifier

A professionally prepared lawn

A line of products dedicated to lawn care composed by ride on mowers and scarifier.

The Eurosystems ride on mowers offer comfortable seating, certified safety systems and various cutting options, from mulching to collecting cut. The Sc42 scarifier makes maneuverability and ease of use its main features.

The Sc42 scarifier can now be supplied also with battery engine EGO power + 56V.

What are the benefits?

1

One of the last Italian lawn mowers on the market which means a short production chain and for the most part local as well as lower consumption and pollution

2

Efficient and responsive after-sales service through a widespread network across the territory which means there is always a fast service and spare parts are always available even in high season

3

Safe, simple and intuitive, both during use and during adjustment and/or maintenance. All the models are certified and comply with the European safety regulations

LAWN

Slalom

ride on mower

HYDROSTATIC GEARBOX
hydrostatic transmission + belt



RUNNING SPEED

0-3 km/h 0-8 km/h

SEMI-PROFESSIONAL



Slalom 67

Slalom 76

Slalom 82

ENGINE	Euro	B&S	Euro	B&S	Euro	B&S
	352.ohv 352 cc 7.2 kW Petrol	3105PB 344 cc 7.7 kW Petrol	352.ohv 352 cc 7.2 kW Petrol	3125PB 344 cc 9.2 kW Petrol	352.ohv 352 cc 7.2 kW Petrol	3125PB 344 cc 9.2 kW Petrol
STARTER	electric		electric		electric	
TRANSMISSION	rear hydrostatic with differential		rear hydrostatic with differential		rear hydrostatic with differential	
DECK	collection blade cutting width 67 cm cutting height 4-10 cm		collection blade cutting width 76 cm cutting height 4-8.5 cm		recycler blade with removable mulching cap cutting width 80 cm cutting height 4-8.5 cm	
OTHER	150 lt collection bag		150 lt collection bag		150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg		143 kg		143 kg	
DIMENSIONS	82x195x104(h) cm		84x195x104(h) cm		88x195x104(h) cm	



GR.WEIGHT 150 KG
PACKAGING 151X84X86(H) CM
PALLET 151X84X172(H) CM / Q* 2PCS



STARTER

electrical, via key with 3 safety positions



COLLECTION BAG
with lever discharge
capacity 150 l



COLLECTION BLADE
cut 67 or 76 cm



ADJUSTMENT LEVERS
cutting height and
advancement speed



DEFLECTOR
for cutting without
collection



MULCHING KIT
recycler blade
+ plate cap
**only for Slalom76*



AS STANDARD



ACCESSORY




PATENTED

LAWN


Asso

ride on mower

MECHANICAL GEARBOX
mechanical transmission + belt




RUNNING SPEED

3.0 km/h 

- 7.7 km/h
- 6.0 km/h
- 4.0 km/h
- 2.5 km/h
- 1.9 km/h

AMATEUR



Asso 67

ENGINE	Euro	B&S
	352.ohv 352 cc 7.2 kW Petrol	3105PB 344 cc 7.7 kW Petrol
STARTER	electric	
TRANSMISSION	rear mechanical with differential	
DECK	collection blade cutting width 67 cm cutting height 4-10 cm	
OTHER	150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg	
DIMENSIONS	82x195x104(h) cm	

Asso 76

ENGINE	Euro	B&S
	352.ohv 352 cc 7.2 kW Petrol	3125PB 344 cc 7.7 kW Petrol
STARTER	electric	
TRANSMISSION	rear mechanical with differential	
DECK	collection blade cutting width 76 cm cutting height 4-8.5 cm	
OTHER	150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg	
DIMENSIONS	84x195x104(h) cm	



GR.WEIGHT 150 KG
PACKAGING 151X84X86(H) CM
PALLET 151X84X172(H) CM / Q* 2PCS



STARTER

electrical, via key with 3 safety positions



COLLECTION BAG
with lever discharge
capacity 150 l



ADJUSTMENT LEVERS
cutting height and
advancement speed



COLLECTION BLADE
cut 67 or 76 cm



DEFLECTOR
for cutting without
collection



MULCHING KIT
recycler blade
+ plate cap
**only for Asso76*



AS STANDARD



ACCESSORY



PATENTED

LAWN

Sc42

scarifier

BELT TRANSMISSION



RUNNING SPEED



AMATEUR



Sc42

	B&S 450 E series	Euro 123.ohv	Euro R170.ohv	Honda GCVx170	NEW EGOpower+ e-powered
ENGINE	125 cc 1.8 kW Petrol	123 cc 2.2 kW Petrol	173 cc 3.2 kW Petrol	166 cc 3.6 kW Petrol	56 V 3,1 kW Electrical
STARTER	recoil	recoil	recoil	recoil	electric
TRANSMISSION	v-belt				
ROTORS	fix knives: 15 pairs of fixed type hardened steel knives, work width 40 cm adjustable working depth 0 <-> 2 cm rotor speed rotation 3.200 rpm				
OTHER	collecting bag 45 lt (optional)				
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings				
NET WEIGHT	32.5 kg	32.5 kg	34 kg	32.5 kg	33 kg
DIMENSIONS	56x121x100(h) cm				

GR.WEIGHT	36.5-38KG
PACKAGING	80X59X57(H) CM
PALLET	80X120X240(H) CM / Q* 8PCS



ROTOR
15 pairs of fixed type
knives



TOOL COUPLING LEVER
with integrated quick-
release safety system



ADJUSTMENT LEVER
spring rotor work depth



COLLECTING BAG
nylon, removable
capacity 45 lt



AS STANDARD



ACCESSORY



PATENTED



GARDEN

Wheel barrow & moto sprayer

Effortless gardeners

We design and build simple but robust machines that make physically strenuous work easier:

The Eurosystems motor wheelbarrows are designed to transport heavy and bulky objects. The battery-powered also means it can be used in closed environments such as greenhouses and warehouses.

The Eurosystems motosprayers are instead designed for the selective spraying of orchards, vineyards and vegetable gardens; the possibility of using different types of liquids allows these tools to be extremely useful and versatile.

What are the benefits?

1

Manoeuvrability and steering comfort thanks to the technical solutions designed and adopted to facilitate the use and steering of our machinery

2

Reduction of physical effort in gardening activities considered tiring which translates into the work being more pleasant and accessible to all


3

Our models are designed to last over time and can be easily repaired even many years after purchase


Carry


wheel barrow

MECHANICAL REDUCER
belt transmission




RUNNING SPEED

2.0 km/h  3.6 km/h

1.7 km/h  3.0 km/h

Carry 24v


AMATEUR



Carry

Carry BATTERY

	B&S 450 E series	Euro 123.ohv	Honda GCVx170	Euro R170.ohv	Euro Battery	NEW EGOpower+ e-powered
ENGINE	125 cc 1.8 kW Petrol	123 cc 2.2 kW Petrol	166 cc 3.6 kW Petrol	173 cc 3.2 kW Petrol	24 V 300 W Electric	56 V 3.1 kW Electric
STARTER	recoil				electric	
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear				endless screw in oil bath and belts 1 forward gear, reverse gear	
TANK	tilting galvanised sheet metal tank max. capacity 85 lt max. load-bearing capacity 100 kg				tilting galvanised sheet metal tank max. capacity 85 lt max. load-bearing capacity 100 kg	
OTHER	-				2 lead batteries 12V 5Ah each	optional lithium batteries
DRIVE WHEELS	tractor profile front tyres 13x5.00-6" with mechanical semi-differential				tractor profile front tyres 13x5.00-6" with mechanical semi-differential	
NET WEIGHT	57 kg	60 kg	60 kg	58 kg	93 kg	61 kg
DIMENSIONS	65x145x100(h) cm				65x145x100(h) cm	

	GR.WEIGHT	62-64 KG
	PACKAGING	110X65X70(H) CM
	PALLET	114X134X225(H) CM / Q* 6PCS

GR.WEIGHT	99-66 KG
PACKAGING	110X65X70(H) CM
PALLET	130X114X155(H) CM / Q* 4PCS



DRIVE WHEELS
tractor profile with
mechanical semi-
differential



TILTING TANK
through lever on the
handlebar handle



REAR WHEELS
pivoting on floating axle



TANK EXTENSION
140 l capacity
fast coupling



FLAT TANK
capacity 160 l
+ sheet metal
platform



SNOW BLADE
85 cm, adjustable
laterally $\pm 30^\circ$



REAR WHEELS
pneumatics



AS STANDARD



ACCESSORY



PATENTED

Carry Sprayer

motosprayer

MECHANICAL REDUCER
belt transmission



RUNNING SPEED

2.0 km/h 3.6 km/h

SEMI-PROFESSIONAL



Carry Sprayer

	B&S 675 EXI series	Honda GCVx170	Euro R170.ohv
ENGINE	163 cc 2.8 kW Petrol	166 cc 3.6 kW Petrol	173 cc 3.2 kW Petrol
STARTER	recoil		
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear		
WORK SYSTEM	diaphragm pump pressure 30 bar, maximum delivery 29 lt/min sprayer lance with atomizer 25m hose with crank winder 120 lt tank with filter		
OTHER	10 lt handwashing tank		
DRIVE WHEELS	tyres, tractor profile 13x5.00-6" with mechanical semi-differential		
NET WEIGHT	94.5 kg	94.5 kg	95.5 kg
DIMENSIONS	74x131x112(h) cm		



GR.WEIGHT 118-119 KG
PACKAGING 145X80X102(H) CM
PALLET 151X82X233(H) CM / Q* 6PCS



TANK

capacity 150 l with filter
+ handwashing tank 10 lt



25 M HOSE

with crank hose reel
holder



PUMP

pressure 30 bar
delivery 29 l/min


DRIVEN WHEELS

tractor profile with
mechanical semi-differential



DRIVEN WHEELS

tractor profile with
mechanical semi-
differential



LANCIA

with pressure atomizer



AS STANDARD



ACCESSORY



PATENTED

Eco Sprayer

motosprayer

RUNNING SPEED



AMATEUR



Eco Sprayer

ENGINE -

STARTER -

TRANSMISSION -


WORK SYSTEM diaphragm pump SBR pressure 4.1 bar, maximum delivery 7.7 lt/min
 sprayer lance with pressure sprayer
 9m hose with hose reel support
 50 lt tank

OTHER batteries (x2) 12 V 5Ah
 10 lt handwashing tank
 front fan sprayer with 2 interchangeable nozzles
 manual parking brake

WHEELS rear steering wheel, fixed front wheels

NET WEIGHT 38 kg

DIMENSIONS 60x115x113(h) cm

 **GR.WEIGHT** 40 KG
PACKAGING 110X65X71(H) CM
PALLET 114X134X225(H) CM / Q* 6PCS



TANK
capacity 50 Lt
+ 10 Lt handwashing tank



FRONT FAN SPRAYER
with two
interchangeable
nozzles



SPRAYER LANCE
with atomizer and 9 m
hose



REAR WHEEL
pivoting with parking
brake



AS STANDARD



ACCESSORY



PATENTED



SOIL

Rear tine tillers and tillers

Horticultural passion

A complete range of hobby, semi-professional and professional tools designed and manufactured in Italy: Eurosystems tillers and rear tine tillers, the result of 50 years of experience, are used for the tilling of small and medium plots of land in horticulture, gardening and small agricultural areas.

Versatile and robust, these work tools require little maintenance and are designed to last over time; at the same time, they can be accessorised with numerous options that extend their ability to be used for ploughing or gardening work.

What are the benefits?



We look for the perfect centre of gravity and the correct weight/rotation speed ratio of the tillers to make the task easy, safe and efficient



We are one of the last true European producers of this product category which means a shorter production chain, local production and less pollution



We design our products in order to last a long time and even today we provide spare parts for models that are more than 40 years old

SOIL

Rtt3

rear tine tiller

MECHANICAL GEARBOX
chain + belt transmission



RUNNING SPEED


1.8 Km/h 2.1 Km/h
1.0 Km/h 1.1 Km/h



SEMI-PROFESSIONAL



Rtt3

ENGINE	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro R210.ohv 212 cc 4.4 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol	Honda GX160 163 cc 3.6 kW Petrol
STARTER	recoil			
HANDLEBAR	vertically adjustable	vertically adjustable	vertically and laterally adjustable	vertically and laterally adjustable
TRANSMISSION	 gears, chain in oil bath and double belt system 2 speed fixed milling, 2 speed reverse			
TILLER	6 stars Ø32 cm – 20 bolted knives work width 60 cm 270 rpm			
OTHER	adjustable spur system for quick visual inspection of correct belt tensioning			
DRIVE WHEELS	tyres, tractor profile 13x5.00-6" with mechanical transport idler			
NET WEIGHT	72 kg	72 kg	70.5 kg	70 kg
DIMENSIONS	63x153x109(h) cm			

	GR.WEIGHT	75-77 KG
	PACKAGING	116,5X53X70(H) CM
	PALLET	110X120X225(H) CM / Q* 6PCS



HANDLEBAR
vertically and laterally
adjustable
** B&S / Honda only*



TOOL COUPLING LEVER
with visual drive belt
tensioning control system



ROTAVATOR
bolted knives
Ø32 cm 60 cm



DRIVEN WHEELS
with mechanical semi-
differential



SMALL ROTAVATOR
cutter 32 cm
iron wheels Ø35x5



RIDGING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Rtt2

rear tine tiller

MECHANICAL REDUCER
chain + belt transmission



RUNNING SPEED

1.0 Km/h 1.1 Km/h

AMATEUR



Rtt2

	Euro 182.ohv	Euro R210.ohv	B&S CR950	Honda GP160
ENGINE	182 cc 3.1 kW Petrol	212 cc 4.4 kW Petrol	208 cc 4.0 kW Petrol	163 cc 3.6 kW Petrol

STARTER recoil

HANDLEBAR	vertically adjustable	vertically adjustable	vertically and laterally adjustable	vertically and laterally adjustable
------------------	-----------------------	-----------------------	-------------------------------------	-------------------------------------

TRANSMISSION gears, chain in oil bath and double belt system
1 fixed milling speed, reverse

ROTAVATOR 6 stars Ø32 cm - 16 riveted knives
work width 50 cm
270 rpm

OTHER adjustable spur system for quick visual inspection of correct belt tensioning

DRIVE WHEELS tyres, tractor profile 13x5.00-6"
with mechanical transport idler

NET WEIGHT	65 kg	66 kg	67 kg	66.5 kg
-------------------	-------	-------	-------	---------

DIMENSIONS 53X116.5X70(h) cm

GR.WEIGHT	71-73 KG
PACKAGING	116,5X53X70(H) CM
PALLET	110X120X225(H) CM / Q* 6PCS



HANDLEBAR
vertically
and laterally adjustable*
* B&S / Honda only



TOOL COUPLING LEVER
with visual drive belt
tensioning control system



ROTAVATOR
riveted knives
Ø32 cm 50 cm



DRIVEN WHEELS
with mechanical
semi-differential



SMALL ROTAVATOR
cutter 32 cm
iron wheels Ø35x5



RIDGING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Euro102

tiller

MECHANICAL GEARBOX
gear drive



TILLER SPEED

39 rpm 172 rpm
130 rpm
39 rpm

PROFESSIONAL



Euro102

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro 178F 296 cc 4.4 kW Diesel
STARTER	recoil	recoil	recoil or electric
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	made in Italy gearbox with gears in oil bath 3 milling speeds, reverse two power take-offs (PTO), one standard and one synchronised with the gearbox		
ROTAVATOR	6 stars Ø34 cm of which 2 removable - 24 bolted knives work width 95-65 cm tillers rotation 172/130/39 rpm		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional, tractor profile tyres 5.00-10" or rubber to be assembled on plant saver discs		
NET WEIGHT	86 kg	95 kg	104 kg
DIMENSIONS	108X145X92(h) cm		


GR.WEIGHT	94-112 KG
PACKAGING	95X50,5X90(H) CM
PALLET	110X120X195(H) CM / Q*4PCS



ROTAVATOR
bolted knives
Ø34 cm 95 cm
can be reduced to 65 cm
with discs



HANDLEBAR
vertically and laterally
adjustable

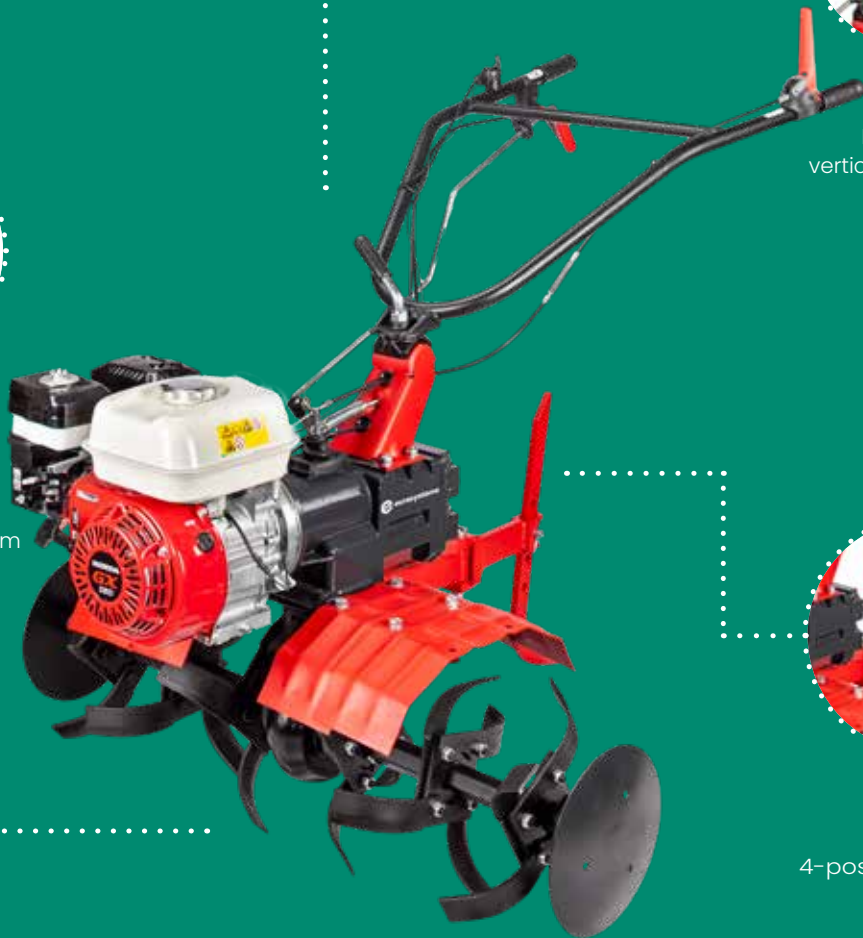

SPUR
4-position adjustable



TRACTOR WHEELS
pneumatic 5.00-10"



CUTTER EXTENSION
work width 112 cm



TRANSPORT WHEELS
to be assembled on discs



TAMPING MACHINE
with adjustable wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Z8

tiller

MECHANICAL GEARBOX chain + belt transmission



TILLER SPEED

39 rpm  101 rpm
79 rpm
inverted belt 142 rpm
110 rpm




LABOUR
39 rpm  101 rpm
23 rpm
inverted belt 142 rpm
33 rpm

SEMI-PROFESSIONAL



Z8

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil		
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2+2 milling speed (rpm change via belt reversal), reverse		
ROTAVATOR	6 stars Ø33 cm of which 2 removable - 24 bolted knives work width 82-58 cm standard tillers rotation 101/79 (inverted belt 142/110 rpm) labour tillers rotation 101/23 (inverted belt 142/33 rpm)		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional, not included		
NET WEIGHT	88 kg	85 kg	88 kg
DIMENSIONS	82X162X118(h) cm		


	GR.WEIGHT 93-90-93KG
	PACKAGING 97X52X81.5(H) CM
	PALLET 110X120X180(H) CM / Q* 4PCS



TRANSMISSION
with reversible belt to
change tiller rpm



HANDLEBAR
vertically and laterally
adjustable

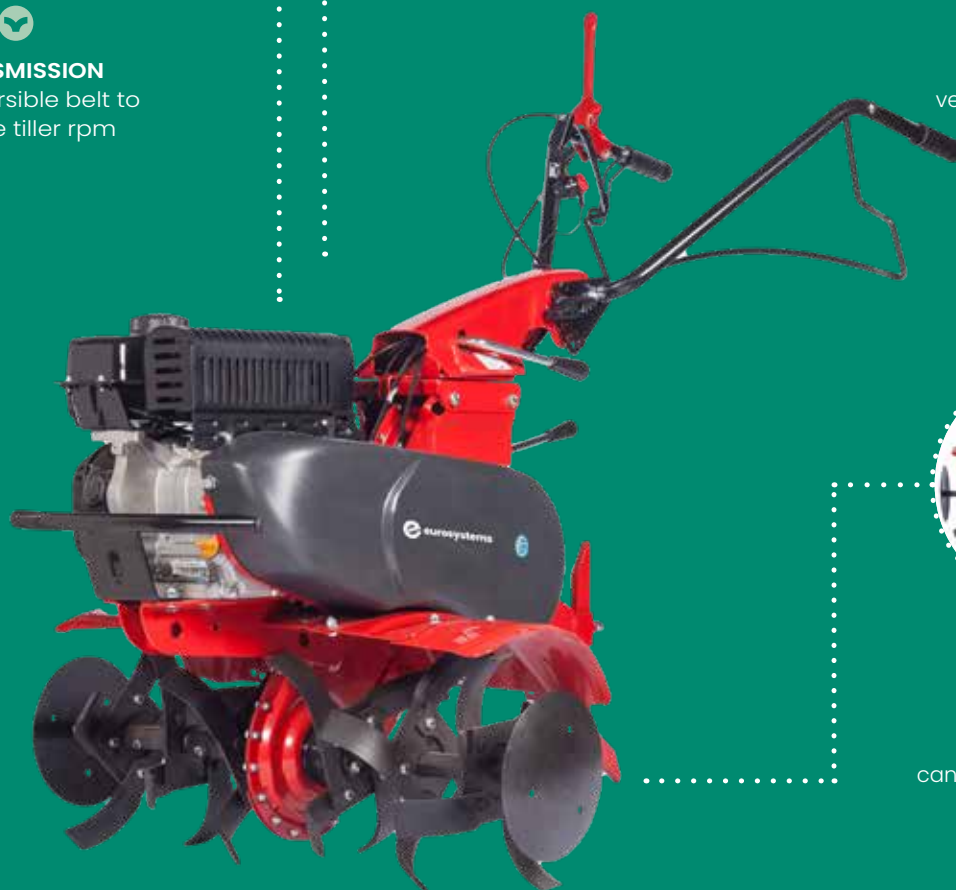

ROTAVATOR
bolted knives
Ø33 cm 82 cm
can be reduced to 58 cm
with discs



TRANSPORT WHEEL
quick tilting



**ROTAVATOR
EXTENSION**
work width 112 cm



TRANSPORT WHEELS
to be assembled on discs



RIDGING PLOW
with adjustable wings



LABOUR PRO KIT
5.00-10" wheels + Ratchets
2 ballast wheels 20 kg each
front ballast 15 kg
swivel plough

**only for Z8 labour*



AS STANDARD



ACCESSORY



PATENTED

SOIL

Euro5 evo

tiller

MECHANICAL GEARBOX
chain + belt transmission



TILLER SPEED

31 rpm 125 rpm
97 rpm

LABOUR
31 rpm 136 rpm
27 rpm

SEMI-PROFESSIONAL



Euro5 evo 2.1

ENGINE	Honda GP160 163 cc 3.6 kW Petrol	Honda GX160 163 cc 3.6 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil		
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2 milling gears, reverse		
ROTAVATOR	6 stars Ø32 cm of which 2 removable - 24 bolted knives work width 75-50 cm tillers rotation 125/97 rpm		
OTHER	plant saver discs, adjustable spur, quick release front transport wheel		
TRANSPORT WHEELS	quick release front transport wheel		
NET WEIGHT	58 kg	58 kg	59 kg
DIMENSIONS	75x140x132(h) cm		

Euro5 evo LABOUR

ENGINE	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil
HANDLEBAR	vertically and laterally adjustable
TRANSMISSION	gears and chain in oil bath and belts 2 milling gears, reverse
ROTAVATOR	6 stars Ø32 cm of which 2 removable 24 bolted knives work width 75-50 cm tillers rotation 136/27 rpm
OTHER	plant saver discs, adjustable spur, quick-release front transport wheel
TRANSPORT WHEELS	quick release front transport wheel
NET WEIGHT	59 kg
DIMENSIONS	75x140x132(h) cm

GR. WEIGHT 63-64 KG
PACKAGING 79X52X71(H) CM
PALLET 80X120X225(H) CM / Q* 6PCS


64 KG
79X52X71(H) CM
80X120X225(H) CM / Q* 6PCS



TRANSPORT WHEEL
quick-lift frontal



HANDLEBAR
vertically and laterally adjustable



ROTAVATOR
bolted knives
Ø32 cm 75 cm
can be reduced to 50 cm
with discs



SPUR
with 4 adjustments



AERATOR
spring-type, 50 cm



RIDING PLOW
with fixed wings



LABOUR CLASSIC KIT
wheels 5.00-10" + fixed axles
2 ballast wheels 20 kg each
front ballast 15 kg
classic plough

**only for labour version*

 **AS STANDARD**

 **ACCESSORY**

 **PATENTED**

SOIL

Euro5 evo

tiller

GEARBOX -
chain + belt transmission



TILLER SPEED

31 rpm 120 rpm

120 rpm

AMATEUR



Euro5 evo CLASSIC

ENGINE	Euro	Honda	Honda	B&S
	182.ohv	GP160	GX160	CR950
	182 cc	163 cc	163 cc	208 cc
	3.1 kW	3.6 kW	3.6 kW	4.0 kW
	Petrol	Petrol	Petrol	Petrol

STARTER recoil

HANDLEBAR vertically adjustable or vertically and laterally adjustable

TRANSMISSION chain in oil bath and belt
1 milling gear, optional reverse

ROTAVATOR 6 stars Ø32 cm of which 2 removable – 24 riveted knives
work width 75–50 cm
tillers rotation 125 rpm

OTHER plant saver discs, adjustable spur

TRANSPORT WHEELS quick release front transport wheel

NET WEIGHT 51 kg | 50.5 kg | 50.5 kg | 51.5 kg

DIMENSIONS 75x125x123(h) cm

GR.WEIGHT 54–56 KG
PACKAGING 79X52X71(H) CM
PALLET 80X120X225(H) CM / Q* 6PCS

Euro5 evo ONE

Euro
R80.ohv
78 cc
1.4 kW
Petrol

recoil

vertically adjustable

chain in oil bath and belt;
1 milling gear, optional reverse

4 stars Ø32 cm – 16 riveted knives
work width 46 cm
tillers rotation 120 rpm

spur

quick release front transport wheel

38 kg

54x137x113(h) cm

43 KG
79X52X71(H) CM
80X120X225(H) CM / Q* 6PCS



TRANSPORT WHEEL
quick-lift frontal



HANDLEBAR
adjustable in height
and laterally



ROTAVATOR
riveted knives
Ø32 cm 75 cm
can be reduced to 50 cm
with discs



SPUR
with 4 adjustments



AERATOR
spring-type, 50 cm



RIDING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Euro3 evo

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED



AMATEUR



Euro3 evo

ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	B&S 625 Exi series 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol
---------------	--	--	--	--

STARTER recoil

HANDLEBAR vertically and laterally adjustable

TRANSMISSION endless screw in oil bath and belt
1 milling gear, optional reverse


ROTAVATOR 4 stars Ø32 cm - 16 riveted knives
work width 50 cm
tillers rotation 130 rpm

OTHER plant saver discs, adjustable spur

TRANSPORT WHEELS quick release double rear wheel

NET WEIGHT	39 kg	41 kg	39 kg	41.5 kg
-------------------	-------	-------	-------	---------

DIMENSIONS 52x142x122(h) cm

 **GR.WEIGHT** 42-44 KG
PACKAGING 80X59X55(H) CM
PALLET 80X120X233(H) CM / Q* 8PCS



ROTAVATOR
riveted knives
Ø32 cm 50 cm
with plant saver discs



HANDLEBAR
vertically and laterally
adjustable



TRANSPORT WHEELS
quick release double
rear wheel



ROTAVATOR EXTENSION
work width 75 cm
**only B&S625/EURO R170*



AERATOR
spring-type, 50 cm



RIDING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Z3 tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED



AMATEUR



Z3

ENGINE	B&S	B&S	Euro	Euro	NEW EGOpower+
	450 E serie	625 Exi serie	139.ohv	R.170	e-powered
	125 cc	150 cc	139 cc	173 cc	56 V
	1.8 kW	2.3 kW	2.7 kW	3.2 kW	3,1 kW
	Petrol	Petrol	Petrol	Petrol	Electrical

STARTER	recoil	recoil	recoil	recoil	electric
----------------	--------	--------	--------	--------	----------

HANDLEBAR vertically and laterally adjustable

TRANSMISSION endless screw in oil bath and belt
1 milling gear, optional reverse

ROTAVATOR 4 stars Ø32 cm - 16 riveted knives
work width 50 cm
tillers rotation 130 rpm

OTHER plant-saving discs, spur

TRANSPORT WHEELS quick release double rear wheel

NET WEIGHT	40 kg	42 kg	40 kg	42.5 kg	45 kg
-------------------	-------	-------	-------	---------	-------

DIMENSIONS 73x50.5x49(h) cm



GR.WEIGHT 43-48 KG
PACKAGING 73X50,5X53(H) CM
PALLET 80X120X225(H) CM / Q* 8PCS



ROTAVATOR
riveted knives
Ø32 cm 50 cm
with plant saver discs



HANDLEBAR
vertically and laterally
adjustable



TRANSPORT WHEELS
quick release double
rear wheel



ROTAVATOR EXTENSION
work width 75 cm
**only B&S625/EURO R170*



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



ACCESSORY




PATENTED

SOIL


Z2

tiller

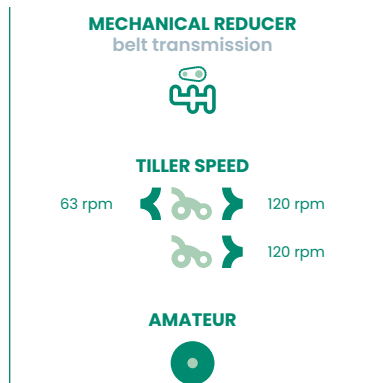

Z2

ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol
STARTER	recoil	
HANDLEBAR	vertically adjustable	
TRANSMISSION	endless worm gear in oil bath and belt 1 milling gear, optional reverse	
ROTAVATOR	4 stars Ø26 cm - 16 riveted knives work width 40 cm tillers rotation 120 rpm	
OTHER	spur	
TRANSPORT WHEELS	quick release double rear wheel	
NET WEIGHT	29 kg	29 kg
DIMENSIONS	50x137x111(h) cm	

	GR.WEIGHT	32-34 KG
	PACKAGING	73X41,5X53(H) CM
	PALLET	90X120X225(H) CM / Q* 12PCS



TILLER
riveted knives
Ø26 cm 40 cm



HANDLEBAR
height adjustment



TRANSPORT WHEELS
quick release double
rear wheel



TILLER REDUCTION
work width 16 cm



SCARIFIER
bladed, 30 cm



AERATOR
spring-type, 50 cm



TAMPING MACHINE
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

La Zappa

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED



110/120 rpm

AMATEUR



La Zappa

ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol	Euro 1300 W 230 V 20 Hz Electric
STARTER	recoil	recoil	recoil	electric
HANDLEBAR	vertically adjustable			
TRANSMISSION	endless screw in oil bath and belt 1 milling gear			
ROTAVATOR	4 stars Ø26 cm - 16 riveted knives work width 36 cm rotation of endothermic motor tillers 110 rpm, rotation of electric motor tillers 120 rpm			
OTHER	spur			
TRANSPORT WHEELS	removable front transport wheel			
NET WEIGHT	25 kg	25 kg	27 kg	23 kg
DIMENSIONS	42.5x126x106(h) cm			



GR.WEIGHT 26-30 KG

PACKAGING 66X38,5X46,5(H) CM

PALLET 80X132X200(H) CM / Q* 16PCS



WHEEL
for transport frontal
removable



HANDLEBAR
height adjustment



ROTAVATOR
16 riveted knives
Ø26 cm 36 cm



SMALL ROTA VATOR
work width 16 cm



SCARIFIER
bladed, 30 cm



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED

SOIL

Z1

tiller

MECHANICAL REDUCER
transmission with clutch



TILLER SPEED



AMATEUR



Z1

ENGINE	Euro 900 W 230 V 50 Hz Electric
STARTER	electric
HANDLEBAR	adjustable in two pre-set positions
TRANSMISSION	endless screw in oil bath 1 milling gear
ROTAVATOR	4 stars Ø25 cm - 16 riveted knives work width 34 cm tillers rotation 140 rpm
OTHER	fixed spur
TRANSPORT WHEELS	quick release double rear wheel
NET WEIGHT	15 kg
DIMENSIONS	43x113x105(h) cm



GR.WEIGHT	17 KG
PACKAGING	37X53,5X55(H) CM
PALLET	80X120X232(H) CM / Q* 16PCS



ROTAVATOR
riveted knives
Ø25 cm 34 cm



IGNITION
electrical with safety
control



TRANSPORT WHEEL
rear with
fixed spur



SMALL ROTAVTOR
work width 16 cm



BALLAST
frontal, 4 kg



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



ACCESSORY



PATENTED



eurosystems

EUROSYSTEMS S.P.A.
via G.Pastore 8 Luzzara (RE) Italy
t: 0039 0522 977 169
f: 0039 0522 977 819
info@eurosystems-spa.com
www.eurosystems-spa.com

EUROSYSTEMS DEUTSCHLAND GMBH

Im Fuchshau 14 | 73635 Rudersberg
t: 0049 07183 305 900
f: 0049 07183 305 9020
info@eurosystems.info
www.eurosystems.info