


Carry

wheel barrow

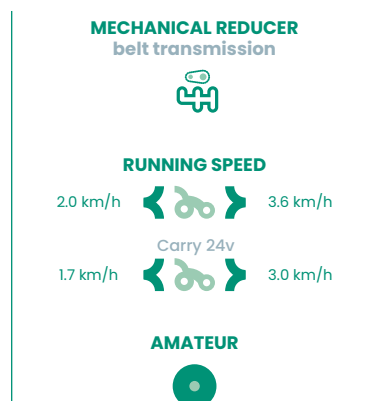

Carry				
ENGINE	B&S 450 E series 125 cc 1.8 kW Petrol	Euro 123.ohv 123 cc 2.2 kW Petrol	Honda GCVx170 166 cc 3.6 kW Petrol	Euro R.145 145 cc 2.6 kW Benzina
STARTER	recoil			
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear			
TANK	tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg			
OTHER	-			
DRIVE WHEELS	tractor profile front tyres 13x5.00-6" with mechanical semi-differential			
NET WEIGHT	57 kg	60 kg	60 kg	58 kg
DIMENSIONS	65x145x100(h) cm			

Carry BATTERY	
Euro Battery	EGOpower+ e-powered
24 V 300 W Electric	56 V 3.1 kW Electric
electric	
endless screw in oil bath and belts 1 forward gear, reverse gear	
tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg	
2 lead batteries 12V 5Ah each	optional lithium batteries
tractor profile front tyres 13x5.00-6" with mechanical semi-differential	
93 kg	61 kg
65x145x100(h) cm	

	GR.WEIGHT	63-66 KG
	PACKAGING	110X65X70(H) CM
	PALLET	114X134X225(H) CM / Q* 6PCS

99-68 KG
110X65X70(H) CM
130X114X155(H) CM / Q* 4PCS



DRIVE WHEELS
tractor profile with
mechanical semi-
differential



TILTING TANK
through lever on the
handlebar handle



REAR WHEELS
pivoting on floating axle



TANK EXTENSION
140 l capacity
fast coupling



FLAT TANK
capacity 160 l
+ sheet metal
platform



SNOW BLADE
85 cm, adjustable
laterally $\pm 30^\circ$



REAR WHEELS
pneumatics



AS STANDARD



OPTIONAL



PATENTED