

SOIL

Z8 tiller

93-90-93KG

97X52X81.5(H) CM

110X120X180(H) CM / Q* 4PCS

82X162X118(h) CM

88 kg

85 kg

88 kg

39 rpm

101 rpm

79 rpm

142 rpm

110 rpm

39 rpm

101 rpm

23 rpm

142 rpm

33 rpm

MECHANICAL GEARBOX

chain + belt transmission

TILLER SPEED


LABOUR

SEMI-PROFESSIONAL

Z8

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil		
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2+2 milling speed (rpm change via belt reversal), reverse		
ROTAVATOR	6 stars Ø33 cm of which 2 removable - 24 bolted knives work width 82-58 cm standard tillers rotation 101/79 (inverted belt 142/110 rpm) labour tillers rotation 101/23 (inverted belt 142/33 rpm)		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional, not included		
NET WEIGHT	88 kg	85 kg	88 kg
DIMENSIONS	82X162X118(h) cm		


GR.WEIGHT	93-90-93KG
PACKAGING	97X52X81.5(H) CM
PALLET	110X120X180(H) CM / Q* 4PCS



TRANSMISSION
with reversible belt to
change tiller rpm



HANDLEBAR
vertically and laterally
adjustable

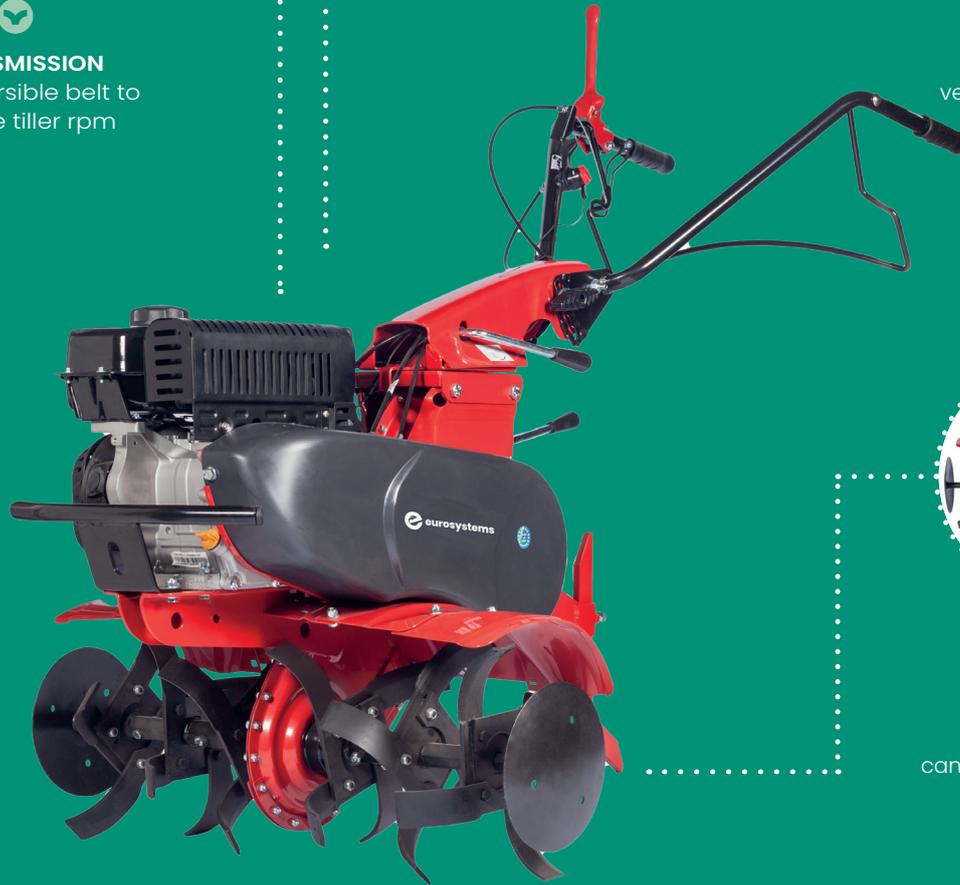

ROTAVATOR
bolted knives
Ø33 cm 82 cm
can be reduced to 58 cm
with discs



TRANSPORT WHEEL
quick tilting



**ROTAVATOR
EXTENSION**
work width 112 cm



TRANSPORT WHEELS
to be assembled on discs



RIDGING PLOW
with adjustable wings



LABOUR PRO KIT
5.00-10" wheels + Ratchets
2 ballast wheels 20 kg each
front ballast 15 kg
swivel plough

**only for Z8 labour*



AS STANDARD



ACCESSORY



PATENTED